



Yale SlotVent

Installation Guide




Contents

1. Routing detail
2. Fly screen for overframe routing detail
3. Installation guide
4. Maintenance

Routing Detail


The incorrect routing can lead to a number of operational, fitting and performance issues.

2500EA

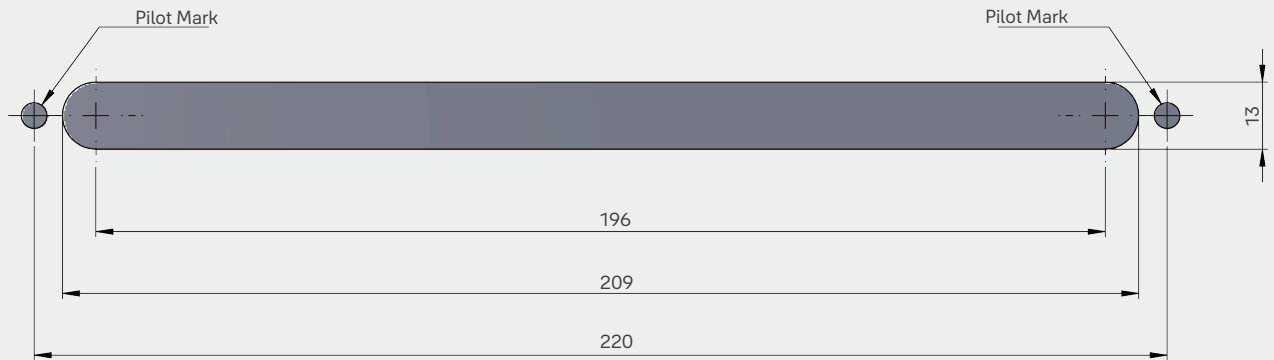


Drawing Ref: YSVEXT2500-ETC Issue 7

4000EA

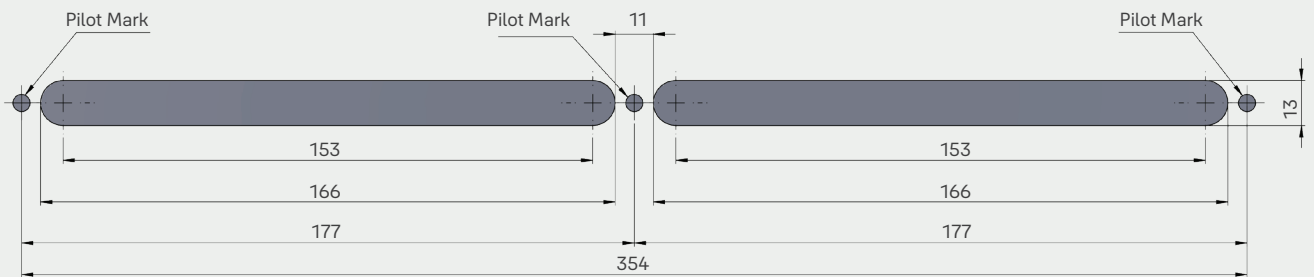

Drawing Ref: YSV4000-ETC Issue 1

5000EA

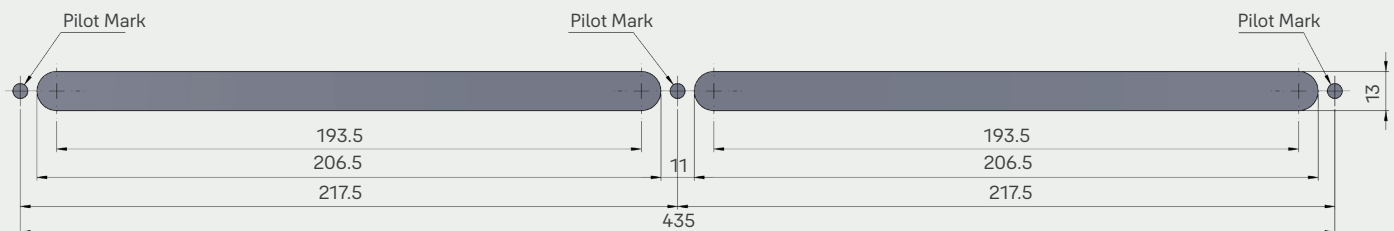


Drawing Ref: YSV5000-ETC Issue 2

Fly Screen for Overframe Routing Detail


The incorrect routing can lead to a number of operational, fitting and performance issues.

2500EA

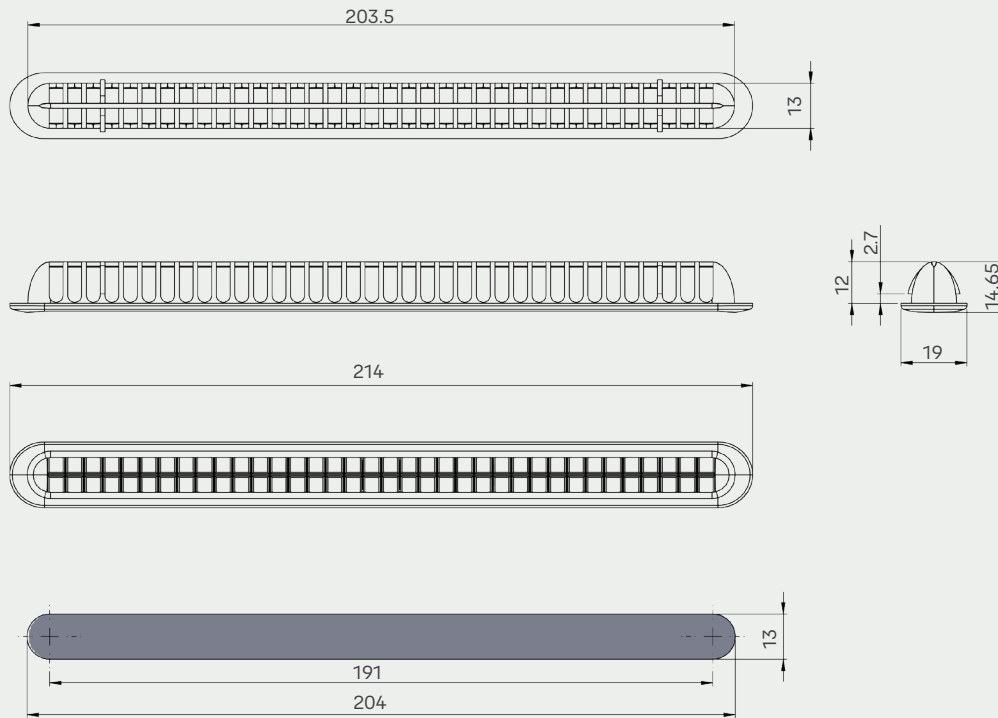

Drawing Ref: YOF2500-ETC Issue 4

4000EA

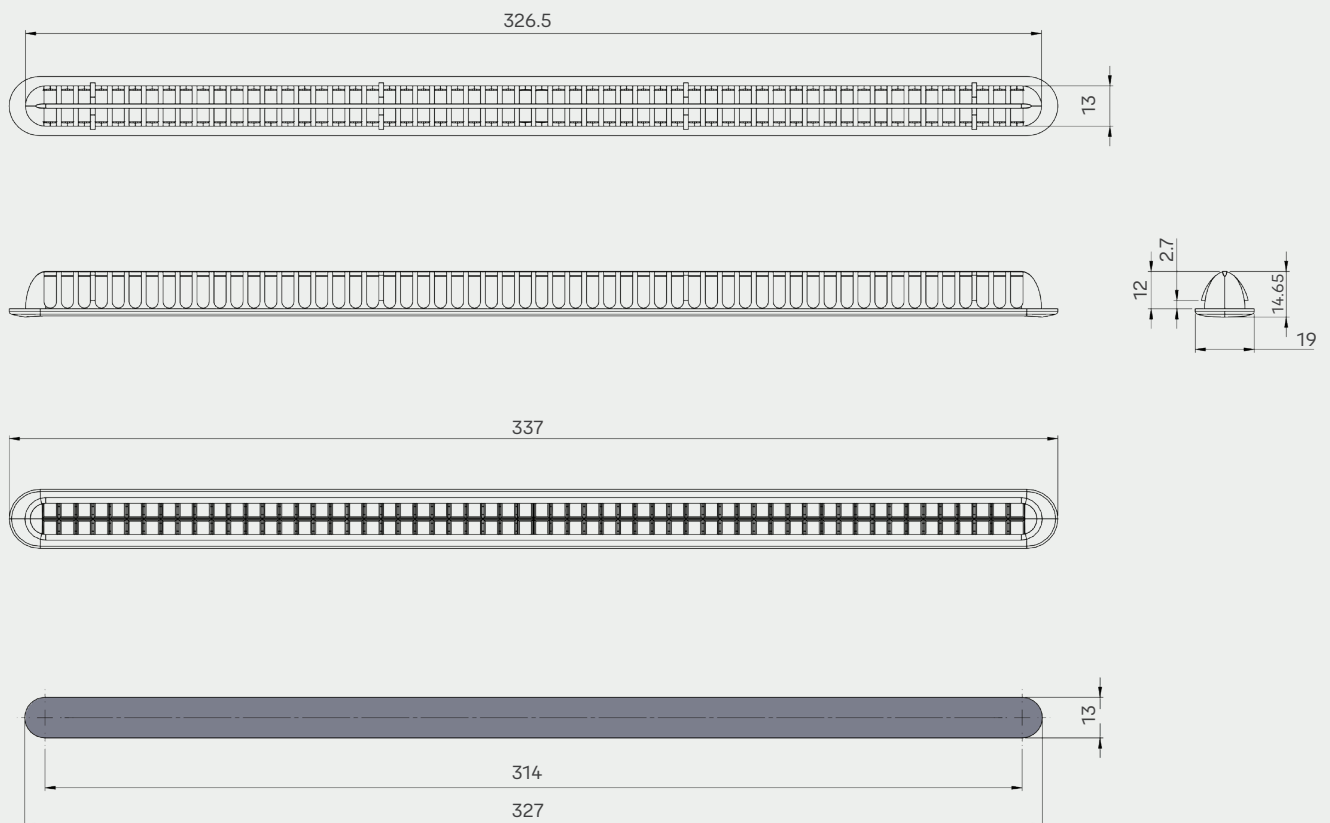


Drawing Ref: YOF4000-WH Issue 1


Installation Guide

Before installing the Yale SlotVent please prepare the sash or frame as per the specified routing detail.


1. Prepare the sash or frame as per the specified routing detail.
2. Offer the inner flap to the internal slot.

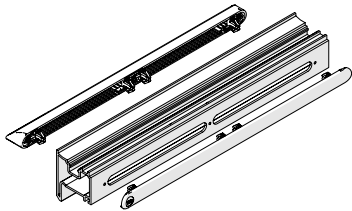

3. Push the inner flap into the profile.
4. Open the inner flap to reveal the screw holes.

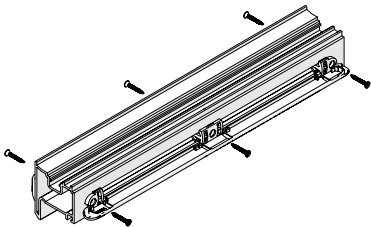

5. Fix the clips to the profile using screws. Yale recommends using Countersunk 25x4.3mm or 25x3.8mm Gimlet Point Screws
6. Repeat steps 2-5 for the external hood.

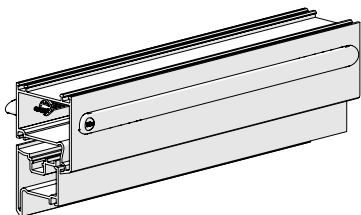

7. Once fixed, close the inner and outer components to hide the fixings.
8. **Hint:** A bead of silicon can be used on the external hood to improve water ingress performance.



Maintenance

Yale recommends the SlotVent is wiped clean at 6-month intervals using a damp cloth. The external hood should be brushed lightly to remove dust and debris.



THE YALE BRAND

Yale is trusted by millions of people everyday to keep what's important to them safe. Our innovations have protected their homes, families and belongings for over 180 years.

We have expanded from being a leader in mechanical lock engineering to innovating connected smart locks and homes.

Because we always make every effort to push the boundaries in a changing world. We were there for your grandparents (and probably theirs) and we'll be there for your children. Today, and every day to come.

This installation guide is to be used in conjunction with the following partcodes: YSV*** and YOF***.

Due to a continuous programme of development the company reserves the right to make alterations without notice. (Products which are not a stocked item will be subject to a longer lead time which needs to be agreed with your Yale representative).

Part of ASSA ABLOY

Yale DWS
School Street, Willenhall, West
Midlands WV13 3PW, UK
T: 01902 366800 F: 01902 369041
www.yaledws.co.uk

Version 1.0 July 2022

ASSA ABLOY©